


**Introduction to the product**

Thank you for using our company's product. This is a composite all-purpose remote control generally used in Europe. It has the functions of manual code setup, automatic search code as well as code query, multi-function keys, favourite channels and family channels.

**Characteristics:**



- ◆ Newly simple recordable model, record once use forever.
- ◆ Extensive code library to operate your brands.
- ◆ Satisfy the need of varied devices with this remote.

**Panel description**

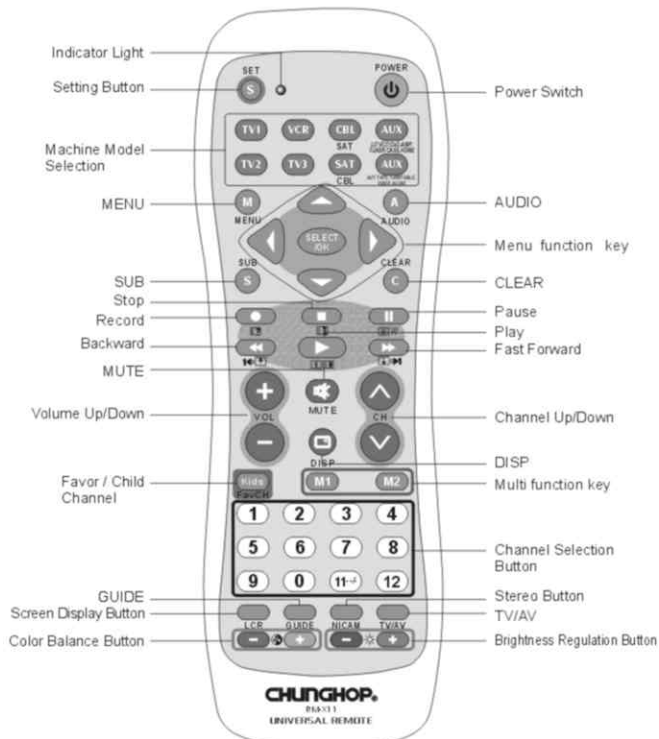

**Installing the batteries**

Slide open the battery compartment and insert two size AA batteries (not supplied). Be sure to line up the + and - on the batteries with the + and - on the battery compartment.



**Notes on the batteries**

- Under normal conditions, batteries will last up to twelve months. If the controller does not operate properly, the batteries might be worn out.
- Do not mix old batteries with new ones or mix different types of batteries together.
- If the electrolyte inside the battery compartment should leak, wipe the contaminated area of the battery compartment with a cloth and replace the old batteries with new ones. To prevent electrolyte from leaking, Remove the batteries when you plan not use the controller for a long period of time.

**Programming the controller**

**Manual programming**

1. See the code form and find the 3-digit figures for your device.
2. Press SET button continuously, then press the device select button you want to control.

TV	
AWA	026 027 033. (152)160 189. 220 706 708. 709 714 730. 740
Baird	162
Barcom	
Basic Line	163 711 731



3. When the indicator light is on, release the two buttons simultaneously.
4. Enter the 3-digit figure you have found.



Note: The indicator light will flash once when you enter a figure.

5. When the indicator light goes out, programming is finished.
6. Check whether operation of other buttons is at normal state. If so, your setting is successfully accomplished.




Note: this remote control can set up 8 home appliance codes at the same time. Just press the 'machine type' key of the home appliance you want to use, and you can then control the appliance directly without the need of resetting.

**Programming the controller**


**Automatic Code Searching**

If your electronic appliances are not listed in the code form, please try the mode of auto-matic code searching.


1. Turn on the controlled electronic appliance, and hold the Remote Controller to aim at the receiving point of the appliance.
2. Press the devices select button you want to control electronic appliance to enter the setting mode of the appliance and at the moment the indicator light will flash once.

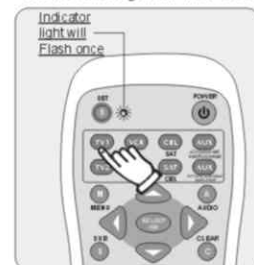

3. Press the button of SET and then press the button of POWER and hold them for 4 seconds, the indicator light will be on.
4. After releasing the two buttons the indicator light will flash constantly. This is the state of automatic searching codes.

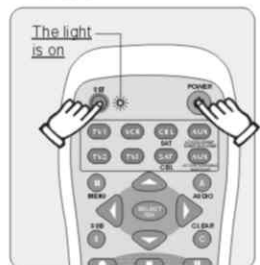

5. Within the flashing time you turn off the remote home appliance switch, press continuously any key twice on the remote control. The home appliance code will then be locked.
6. Check whether operation of other buttons is at normal state. If so, your setting is successfully accomplished.

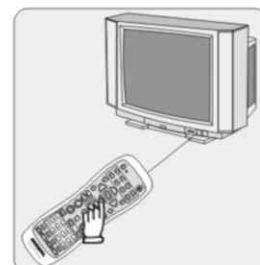

After finding the suitable code, please check if the other key functions can be controlled. If not, repeat step 2 to 5. The re-search maximum key can control the codes of your home appliances. Anytime you want to leave the state of automatic search code, press continuously any key twice on the remote control. If you don't press any key, it will automatically leave this function after you finish searching. The indicator light will turn off at the same time.



**NOTE** Please follow the SETTING STEPS to set Remote Controller so as to control your electronic appliances effectively.

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
A.R. Systems	711							
AB			812					
ABC				452				
Accent		711						
ACE	713							
Adel sound		756						
Admiral	032,155							
Adyson	730							
Aegir			514					
Afreey						688		
Agashi	730							
Aiko	707,711,730							
Aim	711							
Aiwa	261	755,757,758,760			581	626		
Akai	005,159,169,707 711,730,731,745	269,270,271,309 310,356,357,757						
Akiba	711,731,742							
Akito	711							
AKura	711,731,738,740							
Alaron	730							
Alba	705,730,731,738 744	755,757,760	407,521			680		
Albiral	001							
Aldes			511,514					
Alfa Gold			810,811					
Allsar	711	759						
Allsat			499,512					
Allsonic			511					
AlphaStar			499,826					
Amplivision	739							
Amstar			847					
Amstrad	006,711,731,740	755	371,372,408 488,497,506					
Amstrong			506					
Anam	711							
Anitech	711	759						
Anitsch		311						
Ankaro			373,511					
Ansonic	711	756						
Anttron			521					
APEX						672		
Apollo			402					
Aristona	711							
Armstrong			499					
Arthur Martin	739							
ASA	007,009,013,032 094,155,161	282,758						
ASAT			499					
Asberg	711							
Asiagiant				501				
Aston			498					
Astra			372,409,488 506,520					
Astro			502,514,521					
ASTRX			840,842,843 846					
Asuka	731	755,758						
Atlantic	711,730							
ATLE					579			
ATLM						627,671		
Auchan	739							
Audiosonic	160,711,731							
Audioton			512,521					
Aura			430,487					
Ausind	008							
Autovox	004,007,012,014 015,078,079,104 153							
AWA	026,027,033,159 160,189,220,706 708,709,714,730 740	758						

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Baird	162,737	271,273,755						
Barcom			373					
Basic Line	163,711,731							
Baur	711							
BEKO	170,226,711,719							
Benjamin			468					
Beon	711							
BEST	741		453					
Bestar	711							
Blaupunkt	010,017,018,020 054,231,232,233 234,236,241	272,274,275,312 369			568			569(VHS)
BlueSky	711,719,731,738 742,744	757,758,760						
Boca			497,506					
BPL	026,160,162,163 711							
Brandt	733,735,746							
Brinkmann	711	760						
Brionvega	104,155,164,165 200,201,257,711	276,283						
Britannia	730							
Bruns	158							
BSkyB			880,881					
BSR	016,019,021							
BTC	731							
Bush(UK)	022,711,731,738 744	281,755,757,760	402				680,685 689	
Cabletime	246,247,251							524,525 526(CTV)
Cambridge			375					
CANAL+			804					
Carad	711,717							
Caravell						622		
Carena	711,742							
Cascade	711							
Casio	711	755						
Catha	711							
CCE	711							
Centurion	711							
Century	145,146,155							
CGE	019,023,024,145 151,169,170,231	270,277,755						
CGM	093	291						
Chaparral	216		216,374,410					
Cimline	731							
Cineultra						689		
Citycom			507					
Clarivox	001,166,167							
Clatronic	705,711,731							
CNT			514					
CODIAM	138							
Combitech		757						
Commlink			511					
Comtec			511					
Condor	711,730		520					
CONIC						673		
Contec	033,016,730							
Continental_Edison	733,744							
Conrad			520					
Cosat			512					
Crosley	024,025,145,155 231							
Crown	705,711,741,744	759	506					
CS_Electronics	730,731							
CTC Clatronic	096							
Cybertron	731							
Daewoo	168,209,711,730 731	757					660	
Dainichi	730,731							
Dansai	707,711,730	281						
Dansette	740							

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Dawa	711							
Daytron	711							
DCS						642		
Decca(UK)	002,004,026,028 031,258,711	278,755,760						
Denca						665		
Deitron	711							
Denon						547	564(TUNE) 566(DECK)	
Denver						689		
Denzel						684		
Desay						625		
Desmet	711							
Diamant	711	758						
Diamond						683		
Digiline	711							
Distrisat			499					
Dixi	711							
DNT			409,428,430 487,499					
Drake			376,445,446 447,495					
Drean	711							
DSE (Digitor)	026,027,033							
Dual	255,258,711,737	273,279,755				684		
Dual-Tec	004,011,019,029							
Dumont	155	755						
Dux	711							
Dynasat			491,492					
Dynatron	711							
Eastern						508,509 510		
Echostar			377,378,379 386,409,411 412,457,458 461,462,486 800,827,862					
EH.Galaxy			858					
Einhell			497,506,511					
EISAT			822					
Elbe	001,171,711,717 731	313						
Electrosat			870					
Elekta			514					
ELG	711							
Elin	711,730,745							
Elite	108,711,731							
Elman	019,029							
Elta	730		499,512					
Emerson	146,155,711	286						
EMME ESSE			463,464,465					
Encore						688		
Enzer						684		
Erres	711							
ESC	711							
Etron	711							
Euroman	711,730,741							
Europa	711		499					
Europhon	000,004,019,029 030,146,711							
Eurosat			506					
Eurosky			421,497,506 520					
Euro Space			850					
Eurostar			465,513,520 872					
Expert	739							
Exquisit	711							
Fagor_Life	711		512					
Family								
Fenner	033,193,240							
Ferguson	733,735,746	755				679		

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Fidelity(UK)	003,034,229,711 730	755						
Filmnet	202,248							
Finlandia	745	755						
Finlux	007,008,009,013 025,026,029,035 094,161,169,221 711	278,755	414,415					
Firstline	711,730,738	758,760						
Fisher	025,036,155,167 170,255	280,314,315,316			529	546		
Flint	711,731,742							
Force			836					
Formenti-Phoenix	003,008,025,037 038,159,730							
Fortec Star			458,808,809 846,850,851 852,853,854 856,857,859 866,867,876 878,879					
Fraba	711							
Fracarro			380,381					
France Telecom	266							
Freecom			426					
Friac	711,741							
Frontech		759						
FTE			399					
Fuba			413					
Fujitsu		755						
Funai	016,160	359,755						
Funtach			823,824					
Exator			521					
Galaxis	711	755	511,512					
Galaxys			873					
GBC	002,004,019,025 026,031,033,039 040,041,042,731	281						
GE	735							
Geant_Casino	739							
GEC(UK)	711	278						
Geloso	004,019,025,032 033,039,149,150	281						
General	733,743	358						
General_Technic		760						
Genexxa	711,731,740							
Giucar Record			382,416					
GMI			506	515,519				
Goldhand	730							
Goldstar	003,004,043,080 153,172,252,700 701,711,730	282,755,758				633,682		
Goodmans	119,707,711,735 737,744	301,755,758,760						
Goranje	170,173,741							
GPM	731							
Gradiente	711							
Graetz	711							
Granada(UK)	002,004,027,041 044,045,046,047 048,049,711,735 739	272,278,283,314 369,755,758						
Grandin	705,711,717,719 731,739,742	755,758	496					
Great Wall	253							
Grundig	003,010,018,020 045,050,051,053 054,056,094,711 744	272,275,284,361 369,760	383,400,402 484			686		
Haitai						548	648	
Halifax	730							
Hampton	730							
Hanimex		757						



Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Hanseatic	025,027,037,044 052,055,258,711	278,285,758	516					
Hantarex	000,711							
Hantor	711							
Hanuri			514					
Harman						690		
Harwood	711,740							
Hauppauget	026,711							
HCM	711,731,740	759						
Heliocom			520					
Hemmermann	057							
Highline	711							
Hikona	731							
Hinari	033,044,058,059 060,711,731,744	281,286,287,317 360,756,757,759						
Hisawa	731,739,742	757						
Hirschmann			415					
Hitachi	004,040,041,042 044,047,055,061 062,063,064,065 066,067,068,174 221,222,710,711 737	273,281,285,288 755,756	483,828,829		530		684	
Hitsu	730,742							
Hornophone	711							
Hoshai	731,742							
Hotel TV	704							
HTS			327					
Huanyu	730							
Hughes			328,829					
Humax			505					
Huth			421,479,506 511,512,520					
HWALIN			316					
Hygashi	730							
Hyper	003,004,033,153 193,730							
Hypson	711,739,742	757						
Iberia	711							
ICE	711,730,731							
Ices	730,731							
ICX International			417					
Imperial	019,023,024,145 151,169,170,231 711	277,289,755						
Indiana	711							
Ingelen	744							
Ingersoll		756						
Inkei					541			
Inno Hit	000,004,031,043 060,146,175,711 731	759						
INTER (265)	725							
Interbuy		758						
Interfunk	005,027,040,045 046,052,069,070 071,073,075,155 711	278,290						
Intertronic			506					
Intervision	711,731,742,744	755,758,760	512,520,523					
Irradio	008,039,043,060 153,262,711,731	758						
Isukai	711,731							
IT	723							
ITS	711,730,731							
ITT-Nokia	005,032,033,040 041,045,049,069 070,071,072,074 076,162,168,176 177,717,745	270,273,276,290 291,292,316	384,385,418					
ITV	711	758						
Janco	249,250							

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
JBL						623 624		
JEBSEE								
JEC	707							
Jeemon			386					
Jerrold			454	417				
JMB						686		
Johansson			387,512					
JVC	077,119,178,179 731	270,273,292,318 319,320,321,328				605 664		
JSR			386					
Kaisui	163,711,730,731 742							
Kamp	730							
Karcher	159,163,175,711 717,741					549		
Kardon						690		
Kathrein			388,389,390 419,469,499 507,521					
Kawasho	730							
Kendo	146,711,717	758,760						
Kennedy	025,078,079							
Kenwood					527,531 532,533 534	550 580	572,630 663	
Kingseely	730							
Kiss						684		
Kneissel	711,717	757,758,760						
Kolster	711							
KONIG	027							
Konka	711,731							
Kontakt	744							
Korpel	711							
Korting	037,155,157,741							
Kosmos	711							
Kotron	740							
KR			521					
Kyoshu	740							
Kyostar			521					
Lasat			497,506,514 520					
Lecson	711,718					687		
Legend-V						650		
Lenco	033,039,183,238 239,240,711	325,355	423,426,480 481,482		595,596 597,598 599,600 601	060 549	689	585,586 587,588 589,590 591,592 593,594 (CD)
Lenoir	004							
LEON			499					
Lexus			499					
Leyco	705,711							
LG	711,730	755,758				682		
Liesenkotter	711							
Lifesat			516					
Lifetec	711,731,738	760						
Loewe Opta	052,081,155,156 189,213,242,711	272,278,369,756 758	506					
Logik	028	287,322,360,756				669		
Logix	738							
Lorenzen			520					
Luma	032,082,711	322						
Lumatron	711							
Lux May	711							
Luxor	005,045,047,055 068,083,084,085 086,087,162,177 745	285,291	384,391,392			528		
M_ & B			516					
M_Electronic	737							
Macab			420					

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Macom			444					
Madison	711							
Magnadyne	000,019,025,029 057,147,149,150 155							
Magnafon	000,003,008,029 030,730							
Magnasonic		291						
Magnavox	711		477,830,831			553 576 604	571	
Manesth	707,711							
Manhattan	711,738		512,514					
Marantz	026,027,711	272,278,301	499					
Mark	711,730							
Marquant		759						
Maspro			388,393,402 490					
Masuda	731							
Matsui	004,006,028,041 088,182,705,707 711,735,742,744	287,322,332,755 756,757,758,760					683,686	
Max			520					
Maximal	058							
Maxview						670		
MB			516					
Mediamarkt			506					
Mediator	711							
Medion	711,738	757,760						
Mega			499					
Megas	717							
Melectronic	255,711,730	755,758						
Melvox	739							
Memorex		282,314,755,758						
Mercury	711							
Metronic			496,506,507 511,514,521					
Metz	018,053,089,090 091,155,180,183	272,275,294,369 370	383					
Micormay		760						
Micromaxx	711,738							
Microsat			874					
Microsoft X-BOX						620		
Migros		755						
MINA			494					
Minerva	010,018,045,051 053,744	272,275,369	383,400,484					
Minoka	711,740							
Mission						553		
Mitsubishi	044,052,092,119 154,155,181,182 711	278,281,293,320 362,751	489				662	
Mivar	000,003,093,094 095,245,259,730 734							
MME			217					
Monyka							684	
Morgans	711		421,497,499 506					
MTC	730							
Multisystem	159							
Multitech	096,170,172,711 730,738	281,325,755,759						
Murphy(UK)	041,730	755						
Musikland	731							
Mutek							638	
NAD		363						
Naiko	711							
Nakimura	711							
NEC	184,711,742	273,313,320,758	422,478,493			551		
Neckermann	004,026,044,055 082,097,170,711	270,272,273,278 285,286,369	421					
N.E.I.	166,711							

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Neosat			845					
Nesco		755,757						
Netsat	711							
Network			394					
Neufunk	711,717						684	
Neuhaus			520					
New World	731							
NewTech	711,737							
Nicamagic	730							
Nikkai	707,711,730,731							
Nikko			506					
Noblex	711							
Noblisko	003,008,029,051 146,730	272,369						
NOKIA	720,745		502,720,807					
Nordmende	065,067,075,098 099,100,101,102 103,104,134,185 186,222,711,733 735,737	270,273,279,292 295,296,297,318 319,321,323,324 326,327,328,329 330	514				535,549	
Novatronic	711							
OAK				500				
Obritech			426					
Oceanic(F)	005,040,105,106 107,739	755						
Octagon			521					
Osaki		758						
Okano	711	759,760	506					
Onceas	004							
Onkyo							536,537 613 614 615 616	
Onwa	731							
Opera	711							
Orbit	711							
Orion	006,016,028,057 088,108,109,187 188,189,711,735 740	286,322,331,332 333,360,756,757 760					686	
Oritron							683	
Online	711,731							
Ormond	738							
Orson		755						
Osaki	711,731,740	282,755						
Osio	711							
Oso	731							
Osume	731							
Otto Versand	025,027,044,052 055,711	278,285						
Pace			394,395,400 402,485,814 815					
Pacific							676,677 678,679	
Pael	003,008,730							
Palcom			396					
Palladium	197,711	271,356,756,758	421,506					
Palsat			423					
Palsonic	711,740	755						
Panasat			819,863					
Panasonic /National	001,003,019,037 040,106,110,111 112,114,190,212 241,711,738,745	274,290,312,354	473,832				538 573,574 629,639	
Panama	711,730							
Panavision	711							
Panda			520					
Pansat			455					
Paragon				806				
Pathe Cinema	730,739	756						
Penney		313						
Pentax		288						

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Perdio	711	755						
Perfekt	711							
Pershin	739							
Philco	019,023,024,025 151,155,169,170 231,711							
Philex	229							
Philips	003,026,027,046 073,113,115,155 191,192,193,194 223,266,230,242 711,737	278,302,334,335 336,369	402,424,425 460,477,499 507,521,803 830,831,841			552 553 579 604	559,675	560(EQ) 561(PIP) 562(TAPE) 565(TUNE) 567(DCC)
Phoenix	711,730							
Phonola	175,730	278,335						
Phonotrend	711		511			689		
Pilot (1621Y)		753 (Video2)						
Pilot (1624Y)	729 (PIP)							
Pilot (P1528Y)		752						
Pilot (P1707Y)	721							
Pilot (P3033)	727							
Pilot (P3050)		754						
Pilot (P4005)	726							
Pilot (P567)	728							
Pilot (P716)	724							
Pioneer	000,027,067,243 711,737	278,320,334,336 363,364,365	474		545	554 555 610	571,658	
Plantron	711							
Polestar	214							
Powerpoint	744							
Prandoni-Prince	008,032,146							
Praxis	217							
Preisner			497,506					
Premier			802					
Primestat			454					
Prinz		755						
Profekt	711							
Profex		759						
Profitronic	711							
Proline	711,746	755						
Prosat	001		405,451,479 511,523					
Prosonic	705,711,730	755						
Protech	711,738							
Proton						553		
Provision	711		514					
PSR			858					
PYE	711	320						
Quadra_Vision	739							
Quadral			511,523					
Quartz		314						
Quelle	004,005,007,008 009,010,013,016 026,027,028,045 050,051,052,069 094,153,221,231 232,234,235,236 711,738	272,275,278,286 298,369	383,520					
R-Line	711							
Radiola	242,711		499					
Radialva	711,731	758						
Radiotone	705,711,740					549		
Radix			409,428,430 487					
Rainbow			521					
Raite						684		
Rank(UK)	022							
RBM(UK)	022,094							
RCA	204,210,211,735 746	349	450,818,835			602,661 667		
RC-AK			456					
REC						685		
Recor	711							

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Rediffusion(UK)	005,041,116,745							
Reflex	711							
REX	011,021,032,078 079,118	273,292,319						
Revox	711							
RFT			499,511					
Rhapsody	730							
RM(RM2200)			860					
Roadstar	039,711,731	758					685,689	
ROTEL						553 582 583		584(TAPE)
Rover			523					
Royal Lux	740,741	759						
RTG.(SpaceNet)			846					
SABA	000,065,067,075 085,098,099,100 103,117,155,185 186,222,224,733 735,737,745,746	270,273,279,292 295,318,319,321 326,337,338	514,520					
SAE						553		
Sagem	717,742							
Saisho	004,006,028,088 182,244	286,287,322,332 360,760						
Sakura			397,398					
Salora	005,047,048,055 066,068,069,076 082,086,097,162 177,195,249,250 267,268,745	283,285,314	391,418					
Sambers	000,004,008,029 030,043							
Sampo							688	
Samsung	026,033,043,159 160,170,175,212 215,702,703,711 716,730	289	459,475,476 801,877				637,666	
Sandra	730							
Sansui	711	320,759,760				603	686	
Sanwa		756						
Sanyo	013,031,044,074 119,120,121,122 123,162,167,170 182,195,205,711 730	291,314,316,339			539	604 606	681	
SAT 100			372,488					
Saville		757						
Sstcom			516,520					
Sateco			426					
Satline			523					
Satpartner			514,521					
SBR	711							
Schacke			521					
Schaub Lorenz		755						
Schneider	004,011,015,019 025,026,036,038 255,258,262,711 731,737,738	278,281,289,755 758					679	
Schwaiger			516					
Scientific Atlanta			452					
Sears		315						
Seemann			506					
SEG	096,730,738,744	281,289,759	516				684	
Sei-Sinudyne		756						
Seleco	011,058,078	309,758	512					
Senta		277						
Sentra	707,731							
Serino	717,742							
SET		17	825,837,838 839					
Sharp	044,054,119,124 196,198,225,227	301,302,341,758			531	550 566	628	
Sherwood					540,541 577,578			



Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Shinton		356						
Shiva		758						
SHOV	033							
Siam	711							
Siarem	000,025,029,155							
Sicatel	001							
Siemens	010,231,232,233 234,236,711	272,275,291,369	383					
Siera	711							
Siesta	254							
Signal			456,850,855					
Silva	730							
Silver	160,711							
Singer	025,029,147,149 155,711,739							
Sintrack			427					
Sinudyne	006,016,025,026 029,057,109,125 155,192,197,711	278,287						
Skardin			821,822		644			
Sky	711							
Skydigital			880,881					
Skymaster			462,479,511 513,516,523 825,827,855 880,882,883			638,656		
Skymax			499					
Skysonic	718							
Skyvision			512					
SL			497					
Solavox	745							
Sonawa	731							
Sony	028,119,126,127 128,129,130,182 199,228,260	298,299,340,342 343,344,367,750	472,834		617	556 557 575 607	575,621 631,657	563(TAPE) 575(CDV) 618(TUNE)
Sonolor	739							
Sontec		758						
Sound & Vision	731							
Soundwave		758						
Standard	731							
Star			459,470,802 846,868,871 875					
Starlite		758						
Stenway	731							
Stern	078							
Strong			399,423,426 480,492,514 521,864,865 868					
STS			393					
STV			413					
Sumida			506					
Sunkai	711,731,742,744	760						
Sunstar	705	755	497,506					
Suntronic		755						
Sun Moon Star			813					
Super Max			846,848,849 850					
Superla	730							
SuperTech	730,731							
Supex			858,862,869					
Supra		758						
Susumu	735							
Sydney	730							
Sylvania						553 604		
Symphonic		755						
Sytong	730							
TADA				448				
Tadiran			817					
Tagra			512					

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Tai Wah.	218,219							
Taisho		756						
Tandberg	016,180,266	322						
Tandy	731							
Tantec			396					
Tashiko	730	755,758						
Tatung	002,004,026,028 031,131	278,755,757,760					659	
Tay Shoen				517				
Teac	712,740,742	755,758					608 611	634
Tec	735,743							
Techica	731							
Techline	738							
Technics					542	558 609		
Technil_and			512					
Technisat		760	409,428,429 430,431,487 499					
Technosat			263,467,802 869					
Technovision	263							
Technowelt			520					
Teco			506					
Tedelex			466					
Teknika			471					
Telasat			516					
Tele +1	248							
Teleavia	186,733							
Teleciel			521					
Telecor	731							
Telefunken	067,075,098,132 133,134,135,140 185,186,231,235 733,735,737,743 746	270,273,279,292 318,319,321,323 330,345,346,347						
Telegazi	731							
Teleka			506,521					
Telemaster			514					
Telemax			432					
Telemeister		359	398,409,428 430,469,487					
Telesat			516					
Teleservice	203,246							
Teletech	738	755,759	513					
Televideon	730							
Televiso	739							
Telewire			512					
Tensai	013,016,033,037 039,178,731	755,756,758,759						
Tevion	738	760					683	
Thomson	065,067,075,078 098,100,103,185 186,222,722,733 735,737,743,746	270,273,279,292 318,323,324,328	520				668	
Thorn-Ferguson	001,135,136,137 140,144,148,152 160,186,229,256 735	270,273,300,303 304,305,306,308 319,329,330,348 368,758	394,395,400 401,402,433 485					
TMK		286						
Tokai		758	499				684	
Tokyo	707,730							
Tomashi	731							
Tonna			512					
Topline		760						
Toshiba	022,044,094,119 138,139,141,142 707,732	273,292,307	442,444,833	522			571,640	
Towada		759						
TPS			805					
Trans				518				
Transonic	742							

Brand/Device	TV/TXT	VCR	SAT/DSS	CABLE	HIFI	CD	LD/DVD	AUX
Transtec	730							
Tristar	731							
Triumph	732							
Uher	011,012,036,037 038,078,255	273,289,758						
Ultravox	003,025,082,096 146,155,730	276						
Unbranded			481					
Uniden			403,404,406 443,830,831					
United Satellite			440,499,506					
Universum	094,160,221,738 741	755,758,759,760	520				682	
Univox	001							
US Electronics			417					
Vector		313	430,487					
Vegavox	169							
Ventana			499					
Victor		318,328,366					605	
Video		313						
Videocon	033,138,141,715							
Videologique	730,731							
Videotechnic	730							
Viewstar			477					
Vislola	730							
Vortec			459,801,855					
Vortic Star			801					
Voxson	032,155							
Vtech			434,507					
Waltham	733							
Wamishi	742							
Watson	037,705,731,738	757						
Watt Radio	001,003,025,029 030,057,730							
Wega Color	119,143							
Wela			497					
Weltblick		758						
Wharfedale	718						687	
White Westinghouse	003,037,159,730	276,282						
Wesder							689	
WeTeKom			516					
Winco	740							
Winer			080,387,449 844	501				
Wintergarten			511					
WISI			409,420,435 436,437,438 439					
WISO				503,504				
Woorisat			514					
Xenon		322						
Yamaha					543,544	612	684	
Yamishi	731							
Yoko	004,159,730,731 741	758						
Yorx	731							
Zanussi	078							
Zehnder			390,507,514					
Zenith	203,237		441,444,445 446,447				570,682	
Zinwell			821					
Zodica			521					
Zwergnase			506					
Others	206,207,208,264 265	350,351,352,353	820,861				674	